
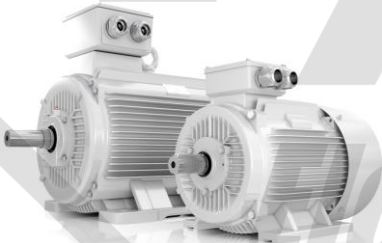


VYBO Electric a.s.								
Data Sheet					No.			
Three Phase Induction Motor					Drawing No.			
Customer								
Client reference								
Type			1LC-160M-4 11KW 400/690V 50HZ					
Brand			VYBO Electric					
Identification								
Type:	1LC-160M-4			Frame:	160			mm
Power:	11 kW			Poles:	4			P
Rated Current:	380 V	22,5	A	Rated Voltage:	400	/	690	V
	400 V	21,4		Connection:	Δ/Y			
	415 V	20,6		Insulation Class:	F			
Speed:	1460 rpm			Temperature Rise:				
Frequency:	50 Hz			Service Factor:	1,0			
Direct on line starting torque ratio (LRT/RLT):	2,2			Duty:	S1, S2, S3, S4-S9			
Direct on line pull out torque ratio (BDT/RLT):	2,3			Ambient Temperature:	-35~50°C (On request possible 62°C)			
Direct on line starting current ratio (LRA/RLA):	7			Altitude:	1000m			
Efficiency:	88,4 %			Protection Degree:	IP55			
Power factor:	0,84			Cooling:	IC411			
Noise level:	75 dB(A)			Mounting:	IM B (On request)			
Weight:	100 kg			Vibration:	2.8 mm/s			
Rotor inertia:	0,0747 kg/m ²			Direction of Rotation:	Both			
				Starting Method:	DOL or VFD			
				Coupling:	DIRECT			
				Load Type:	Parabolic or linear curve			
				Terminal box:	2xM40X1.5			
				Bearing Information				
					DE		NDE	
				Bearing:	63092RZC3		63092RZC3	
				Regreasing int.(h):				
				Grease amount(g):				
Grease:								
Notes / Accessories				Deviation Sheet				
				VYBO Electric		Customer		
Standards								
Specification:	IEC60034-1 / GB755							
Test:	IEC60034-2 / GB/T1032							
Noise:	IEC60034-9 / GB10069.3							
Vibration:	IEC60034-14 / GB10068							
Edition								
Performed		Checked		Date				
Item	Changes			Performed	Checked	Date		